


DATA SHEET



AGX-PA120Ex 125kHz Antenna ATEX Zone 2 / 22

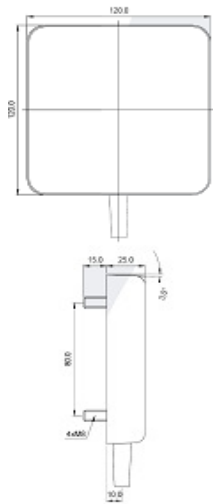

powered by



Product Description		AGX-PA120Ex-LF Fix mount antenna
Electrical Characteristics		
Description:	LF antenna for use in potentially explosive atmospheres	
Operating Frequency	LF 125kHz	
Supported Reader	AGX 30 LF TRIO	
Thermal & Environmental Characteristics		
Operating Temperature	-20°C up to +60°C	
Read Distance:	Up to 200 mm	
Physical Characteristics		
Housing:	Polyurethan (PU)	
Dimensions:	120x120x20 mm	
Weight:	1 kg	
Cable	5m, 10m or 15m (on request)	
Specials:	Aircoil Antenna	
Ex Marking:	II 3G EEx nL 58 II 3D EEx ic D T125°C	
Article no:		
Article no:	AGX-PA120Ex	
Typical Applications		
All LF RFID applications in ATEX Zones 2 & 22		
Industrie		
Chemical Industrie		

AGILLOX GmbH
 Hopfensiegelweg 8
 D-84072 Au i. d. HALLERTAU
 Tel: +49 8752 869911
 Fax: +49 8752 8657931

Contact:

sales@agillox.com
 www.agillox.com