


DATA SHEET

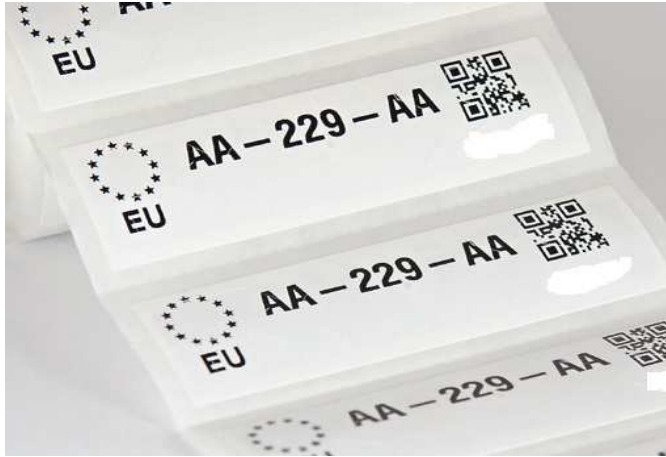

AGX AD1200WS Tag (Tamper Windshield Tag)

Product Description		AGX AD1200WS
Physical Specifications		
Encasement	Paper	
Size (mm) (tolerance)	92 x 26 x 0.2 +/- 0.5 mm / 3.61 x 1.02 x .007 +/- 0.02 in	
Weight	1gr	
Reel Core inner diameter	76mm or 3"	
Outside roll diameter	203mm or 8"	
Pitch on reel	31.75mm or 1.25"	
RF Specifications		
Protocol	EPC Class 1 Gen2	
Frequency Range (MHz)	865-868 (EU) / 902-928 (US)	
Read Range (Fixed reader) 1	Up to 12.0m (39 ft)	
Read Range (Handheld reader) 1	Up to 7.0m (22ft)	
Material Compatibility	Glass	
IC Type (chip)	Alien H3	
Memory 2	EPC - 96bits, User - 512bits, TID - 64bits	
Environmental Specification		
Operating Temperature	-40 to +70 °C	
Long term Max Temperature 1 exposure - (days,weeks,years)	+70 °C	
Short term Max Temperature 1 exposure - (minutes,hours)	+85 °C	
Shock and Vibration	MIL STD 810-F	
Attachment	Film adhesive (std)	
Certifications	RoHS approved CE approved	
Article no:		
Article no:	AGX AD1200WS	
Typical Applications		
Parking Permits		
Vehicle Access Control		
Vehicle Registration		

Contact:

sales@agillox.com
www.agillox.com