
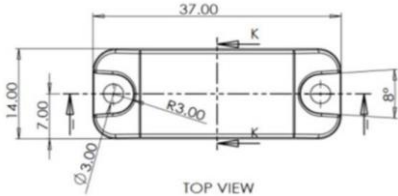


# DATA SHEET



## AGX HT004 Tag

High Temperature > 235°C

Product Description		AGX HT004 Tag
<b>Physical Specifications</b>		
Size (mm) (tolerance)	37 x 14 x 5.9 +/- 0.5mm	
Weight	5,7 gr	
<b>RF Specifications</b>		
Protocol	EPC Class 1 Gen2	
Frequency Range (MHz)	866-868 (EU) , 902-928 (US)	
Read Range (Fixed reader)1	Up to 4 m	
Read Range (Handheld reader)1	Up to 2 m	
Material Compatibility	Optimized for Metal substrates	
IC Type (chip)	Alien H3	
Memory 2	EPC - 96bits, User - 512bits, TID - 64bits	
<b>Environmental Specification</b>		
Operating Temperature	-20 to +85 °C	
Long term Max Temperature 1 exposure - (days,weeks,years)	-20 to +235 °C	
IP Rating	IP68	
Shock and Vibration	MIL STD 810-G	
Impact	2kg from 1m	
Attachment	Mechanical (std) 2 x Ø3mm holes	
Certifications	RoHS approved CE approved ATEX/IECEX certified (option) US&Canada (C1D1/D2) certified (option)	
Applications		
		
<b>Article no:</b>		
Article no:	AGX HT004 Tag	
<b>Typical Applications</b>		
Suitable for metal environment	Offshore	Healthcare
Maintenance & Service	Oil & Gas	Surgical instruments & implants
Industrie & Logistics	Chemical Industry	

Contact:

sales@agilox.com  
www.agilox.com