


**AGX TWN3
Reader Family
125kHz or 13.56MHz**

Product name		AGX TWN3					
Technical data							
Read/write unit version	HID PROX	Multi125	Inditag	MIFARE	MULTI ISO	HID iCLASS	LEGIC
Housing:	Material ABS, colour black or white						
Frequency:	125 kHz			13,56 MHz			
Dimensions:	88mm x 56 mm x 18 mm						
Power Supply:	5V ± 10% via communication cable						
Supply Current:	140mA	220mA	220mA	120mA	N/A	220mA	280mA
Temperature Range:	0°C bis +50°C						
Antenna type:	Aircoil			PCB aircoil			
Read-/Write range:	up to 10cm (depending from the Tag)						
Supported RFID Transponder Tags:	HID PROX	EM410x HITAG 1 HITAG 2 HITAG S EM4150 T5567, Q5	Indala	ISO 14443A: Mifare Ultralight Mifare Mini Mifare 1k, 4k Mifare DESfire*	ISO14443A: Mifare Ultralight, Mifare Ultralight C, Mifare Mini Mifare 1k, 4k Mifare DESfire Mifare Plus ISO14443B ISO15693	HID iCLASS	Legic Prime, Legic Advant

* Support is limited to reading of the serial number exclusively

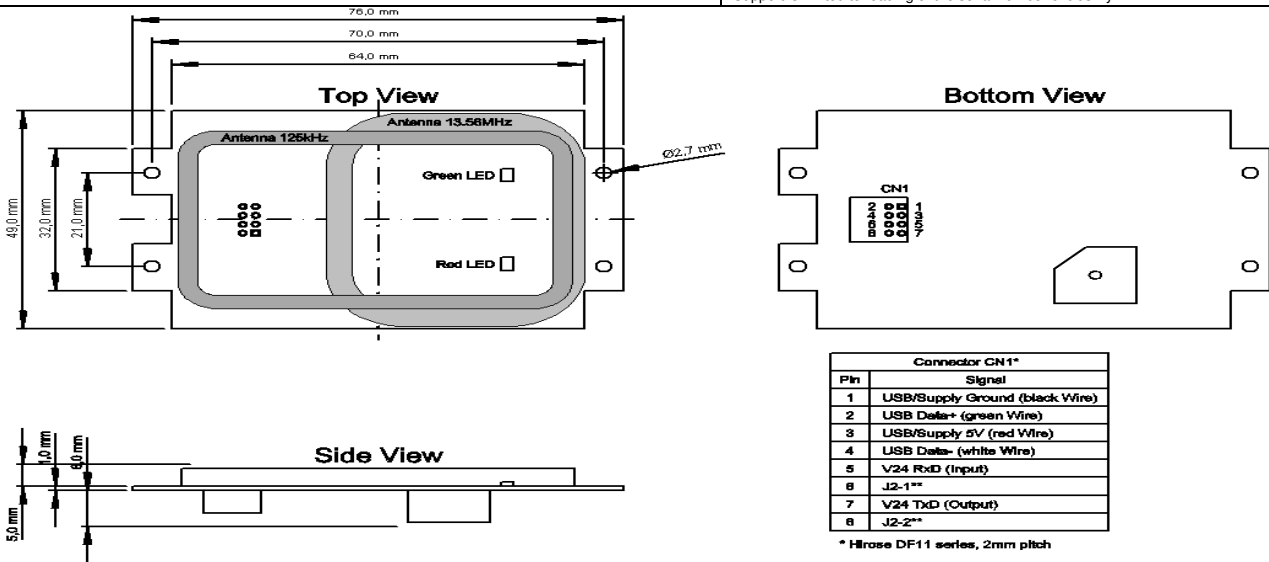

Article No: **AGX TWN3**

Typical Applications:

Asset Management	POS	Maintenance and Service
Fashion & Apparel industrie	Pharma and Cosmetic	Transport and Delivery
General Logistics	Health Care	Food
Industry & Automotive	Bibliothec and Documents	Access control